SCB02.0	Concrete beams in section - 12in wide	Updated: 31 Jan 2007	V1.1
		Detail Scale: 3/4"=1'-0"	

Size	Width	Depth
12x12	12"	12"
12x14	12"	14"
12x16	12"	16"
12x18	12"	18"
12x20	12"	20"
12x22	12"	22"
12x24	12"	24"

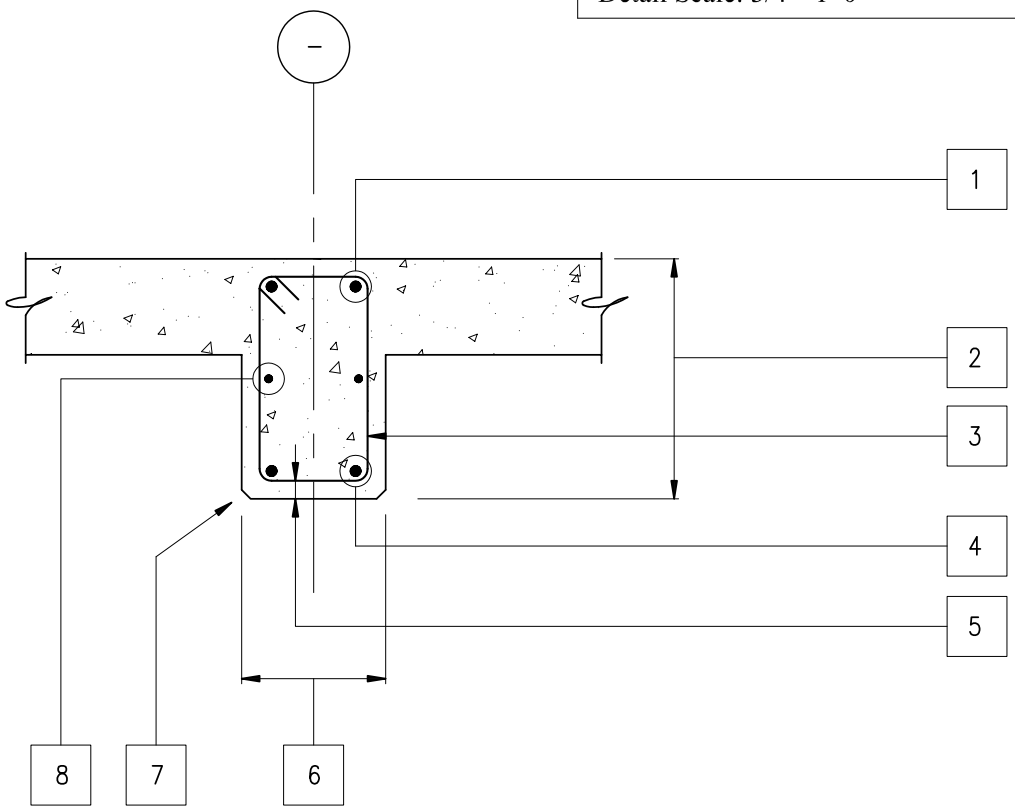

Notes	Comments:	Ref.	Reference Name	Section
1	Continuous top primary reinforcement			
2	Beam depth including slab thickness			
3	Beam stirrups			
4	Continuous bottom primary reinforcement			
5	1 1/2" clear distance to stirrups typical all around beam			
6	Beam width			
7	3/4" chamfer typical at all exposed beam edges			
8	Continuous secondary side bars			

www.axiomcpl.com Established 2004 Axiom Central Professional Library

Copyright © 2004-2007 Axiom Solutions, LLC. All rights reserved.

From the Studio of SPINWEB

axiomcpl™ is a trademark of Axiom Solutions, LLC. This site is protected by copyright and trademark laws under US and international law. Please review our Legal Notices.

All other brands, product names or trademarks belong to their respective holders.

Republication or redistribution of Axiom Solutions, LLC content is expressly prohibited without the prior written consent and agreement with Axiom Solutions, LLC.